



10,000 SQFT BLDG							
FACADE	TOTAL AREA	OPENING AREA	TOTAL - OPENING	TOTAL LENGTH	TOTAL OPENING LENGTH	% OF OPENING LENGTH (25% REQ'D)	% PRIMARY MASONRY BRICK/STONE
NORTH - PRIMARY	1,056 SQFT	146 SQFT	910 SQFT	116 FT	36 FT	31%	50%
SOUTH - PRIMARY	1,056 SQFT	323 SQFT	749 SQFT	116 FT	35 FT	31%	48%
EAST - PRIMARY							
ARTICULATED ENTRANCE	1,219 SQFT	222 SQFT	997 SQFT	88 FT	80 FT	45%	90%
WEST - PRIMARY	980 SQFT	75 SQFT	905 SQFT	88 FT	15 FT	28%	43%


HORIZONTAL ARTICULATION OF PRIMARY FACADE SHOULD OCCUR EVERY 30FT IN BETWEEN AN OFFSET THAT PROJECTS OUT FROM THE WALL AT 1.5FT. THE LENGTH OF THE OFFSET IS 7.5 FT.

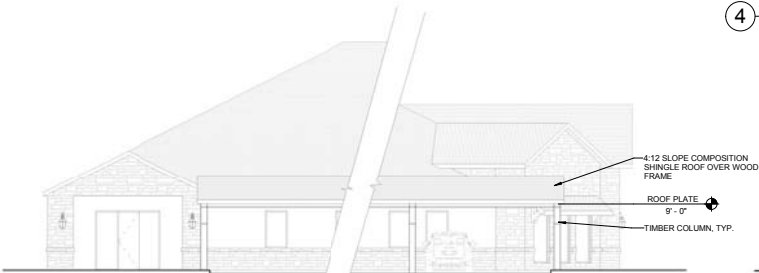


7 PARKING STRUCTURE - FRONT
Scale: 1/8" = 1'-0"

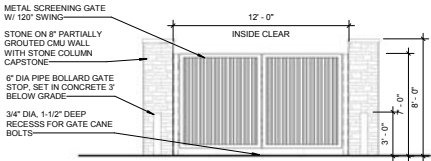


6 DUMPSTER ENCLOSURE FRONT
Scale: 1/4" = 1'-0"
NOTE: REFER TO SITE PLAN FOR DUMPSTER ENCLOSURE LOCATION




5 DUMPSTER ENCLOSURE TYPICAL
Scale: 1/4" = 1'-0"
NOTE: REFER TO SITE PLAN FOR DUMPSTER ENCLOSURE LOCATION

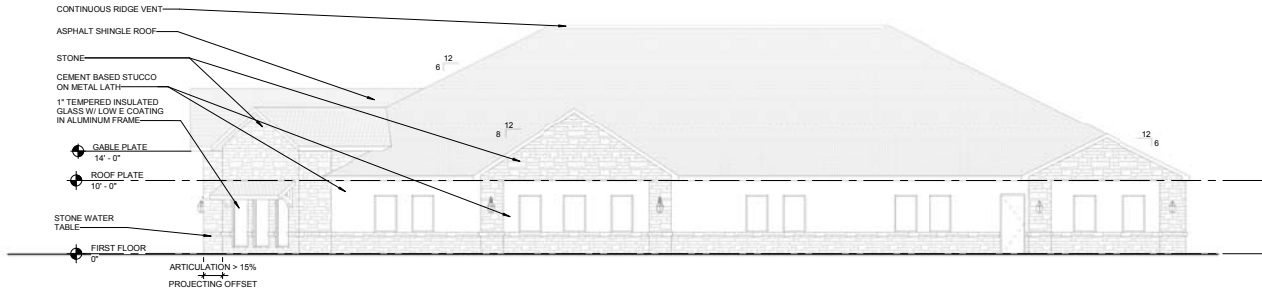


4 NORTH ELEVATION
Scale: 1/8" = 1'-0"

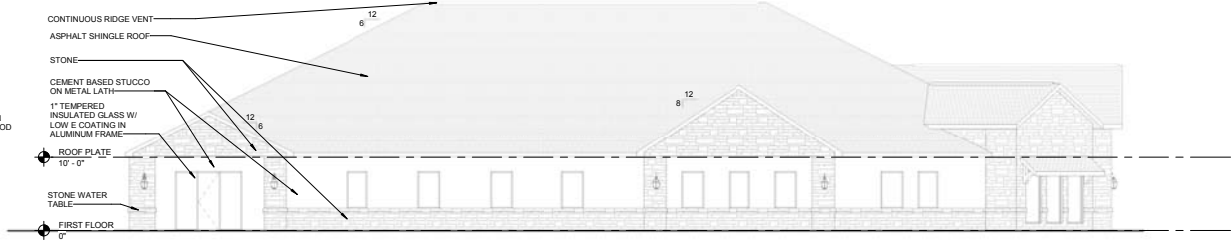

3 SOUTH ELEVATION
Scale: 1/8" = 1'-0"

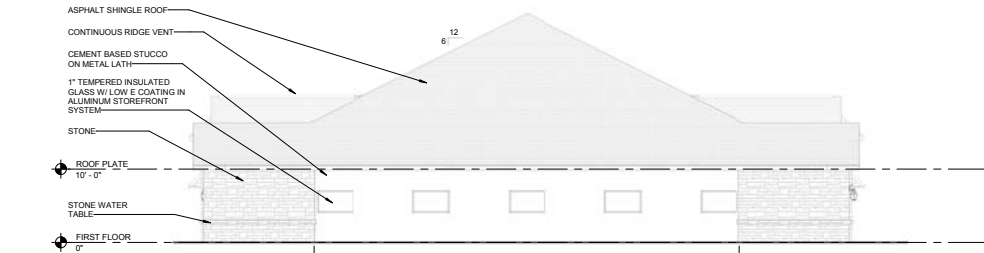

2 WEST ELEVATION
Scale: 1/8" = 1'-0"

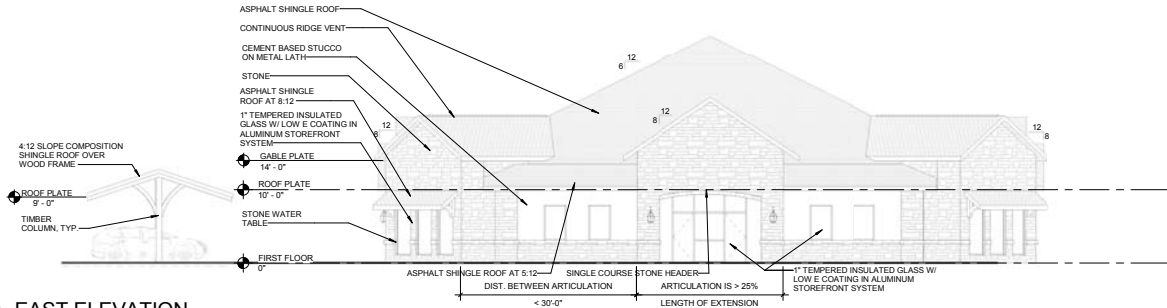

1 EAST ELEVATION
Scale: 1/8" = 1'-0"

OWNER/APPLICANT:
BRAMATA COMPANY, LLC
CONTACT: FRAY WEBSTER
P.O. BOX 1108
COLLEYVILLE, TEXAS 76034
(817) 336-4162

ARCHITECT:
MCGREGOR MURPHY ARCHITECTURE
310 WHITEWING LANE
MURPHY, TEXAS 75094
(817) 454-2384

ENGINEER:
WALTER J. NELSON AND ASSOCIATES
F-0902
1812 CARLA AVENUE
ARLINGTON, TEXAS 76014
(817) 642-9119

EXTERIOR
ELEVATIONS -
10,000 S.F. BLDG

PROJECT
MEDICAL OFFICE
AND OFFICE USES
820 S. CARRIER PARKWAY
CITY OF GRAND PRAIRIE
DALLAS COUNTY, TEXAS

CASE NO. S171101


FACADE BREAK-DOWN

5,000 SQFT BLDG - NORTH							
FACADE	TOTAL AREA	OPENING AREA	TOTAL - OPENING	TOTAL LENGTH	TOTAL OPENING LENGTH	% OF OPENING LENGTH (50% REQ'D)	% PRIMARY MASONRY BRICK/STONE
NORTH - PRIMARY	1,244 SQFT	120 SQFT	1,124 SQFT	100 FT	24 FT	24%	67%
SOUTH - ARTICULATED ENTRANCE	1,244 SQFT	144 SQFT	1,100 SQFT	100 FT	24 FT	24%	57%
EAST - PRIMARY	565 SQFT	60 SQFT	505 SQFT	50 FT	12 FT	24%	61%
WEST - PRIMARY	565 SQFT	60 SQFT	505 SQFT	50 FT	12 FT	24%	61%

HORIZONTAL ARTICULATION OF PRIMARY FACADE SHOULD OCCUR EVERY 30FT IN BETWEEN AN OFFSET THAT PROJECTS OUT FROM THE WALL AT 1.5FT. THE LENGTH OF THE OFFSET IS 7.5 FT.


5,000 SQFT BLDG - SOUTH							
FACADE	TOTAL AREA	OPENING AREA	TOTAL - OPENING	TOTAL LENGTH	TOTAL OPENING LENGTH	% OF OPENING LENGTH (50% REQ'D)	% PRIMARY MASONRY BRICK/STONE
NORTH - ARTICULATED ENTRANCE	1,244 SQFT	144 SQFT	1,100 SQFT	100 FT	24 FT	24%	57%
SOUTH - PRIMARY	1,244 SQFT	120 SQFT	1,124 SQFT	100 FT	24 FT	24%	67%
EAST - PRIMARY	565 SQFT	60 SQFT	505 SQFT	50 FT	12 FT	24%	61%
WEST - PRIMARY	565 SQFT	60 SQFT	505 SQFT	50 FT	12 FT	24%	61%

HORIZONTAL ARTICULATION OF PRIMARY FACADE SHOULD OCCUR EVERY 30FT IN BETWEEN AN OFFSET THAT PROJECTS OUT FROM THE WALL AT 1.5FT. THE LENGTH OF THE OFFSET IS 7.5 FT.

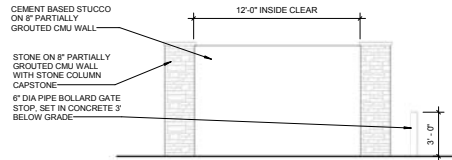


6 DUMPSTER ENCLOSURE TYPICAL

Scale: 1/4" = 1'-0"
NOTE: REFER TO SITE PLAN FOR DUMPSTER ENCLOSURE LOCATION

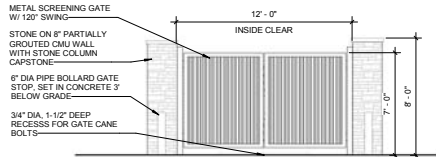


5 DUMPSTER ENCLOSURE FRONT

Scale: 1/4" = 1'-0"
NOTE: REFER TO SITE PLAN FOR DUMPSTER ENCLOSURE LOCATION

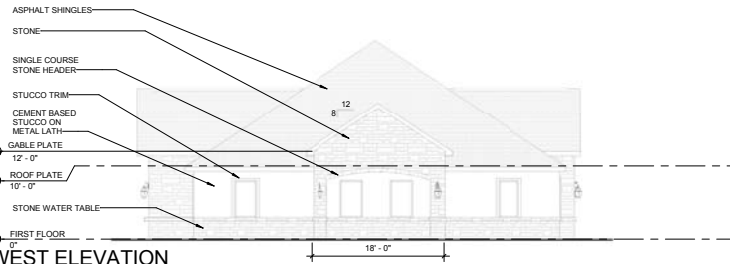

4 WEST ELEVATION

Scale: 1/8" = 1'-0"

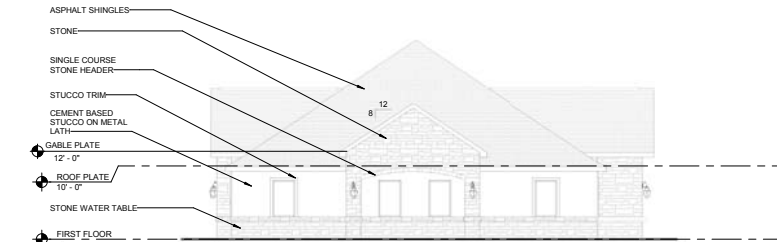


3 EAST ELEVATION

Scale: 1/8" = 1'-0"



2 SOUTH ELEVATION

Scale: 1/8" = 1'-0"

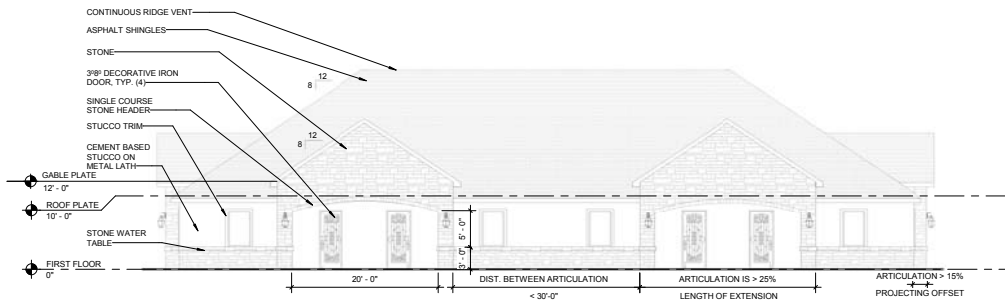

1 NORTH ELEVATION

Scale: 1/8" = 1'-0"

OWNER/APPLICANT:
BRAMATA COMPANY, LLC
CONTACT: FRAY WEBSTER
P.O. BOX 1108
COLLEYVILLE, TEXAS 76034
(817) 336-4162

ARCHITECT:
MCGREGOR MURPHY ARCHITECTURE
310 WHITEWING LANE
MURPHY, TEXAS 75084
(817) 454-2384

ENGINEER:
WALTER J. NELSON AND ASSOCIATES
F-0062
1812 CARLA AVENUE
ARLINGTON, TEXAS 76014
(817) 642-9119

**EXTERIOR
ELEVATIONS -
5,000 S.F. BLDG**

PROJECT

**MEDICAL OFFICE
AND OFFICE USES**
820 S. CARRIER PARKWAY
CITY OF GRAND PRAIRIE
DALLAS COUNTY, TEXAS

CASE NO. S171101